



UNIVERSITY OF ENGINEERING AND TECHNOLOGY TAXILA

FACULTY OF TELECOMMUNICATION AND INFORMATION ENGINEERING

Computer Engineering Department

DIGITAL IMAGE **PROCESSING**

LAB MANUAL 4

Intensity Transformations

Prepared By: Engr. M J Khan



INTENSITY TRANSFORMATIONS

LAB OBJECTIVE:

The objective of this lab is to understand & implement

- 1 Image enhancement in spatial domain through Gray level Transformation function
- 2 Linear Transformation
 - Image Negation function
 - Identity function
- 3 Logarithmic Transformation
- 4 Power Law Transformation
- 5 Piece Wise Linear Transformation

BACKGROUND MATERIAL:

Image Enhancement in Spatial Domain -Basic Grey Level Transformations

Image enhancement is a very basic image processing task that defines us to have a better subjective judgement over the images. And Image Enhancement in spatial domain (that is, performing operations directly on pixel values) is the very simplistic approach. Enhanced images provide better contrast of the details that images contain. Image enhancement is applied in every field where images are ought to be understood and analysed. For example, Medical Image Analysis, Analysis of images from satellites, etc.

Image enhancement simply means, transforming an image f into image g using T . Where T is the transformation. The values of pixels in images f and g are denoted by r and s , respectively. As



said, the pixel values r and s are related by the expression,

$$s = T(r)$$

where T is a transformation that maps a pixel value r into a pixel value s . The results of this transformation are mapped into the grey scale range as we are dealing here only with grey scale digital images. So, the results are mapped back into the range $[0, L-1]$, where $L=2^k$, k being the number of bits in the image being considered. So, for instance, for an 8-bit image the range of pixel values will be $[0, 255]$.

There are three basic types of functions (transformations) that are used frequently in image enhancement. They are,

- Linear,
- Logarithmic,
- Power-Law.

The transformation map plot shown below depicts various curves that fall into the above three types of enhancement techniques.

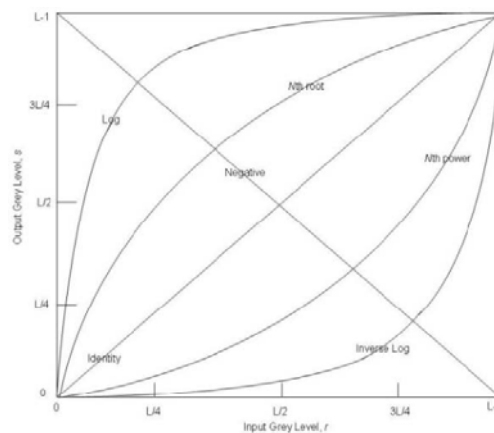


Figure A: Plot of various transformation functions



UNIVERSITY OF ENGINEERING AND TECHNOLOGY TAXILA
FACULTY OF TELECOMMUNICATION AND INFORMATION ENGINEERING
Computer Engineering Department

The Identity and Negative curves fall under the category of linear functions. Identity curve simply indicates that input image is equal to the output image. The Log and Inverse-Log curves fall under the category of Logarithmic functions and n th root and n th power transformations fall under the category of Power-Law functions.

1. Image Negation

The negative of an image with grey levels in the range $[0, L-1]$ is obtained by the negative transformation shown in figure above, which is given by the expression,

$$s = L - 1 - r$$

This expression results in reversing of the grey level intensities of the image thereby producing a negative like image. The output of this function can be directly mapped into the grey scale look-up table consisting values from 0 to $L-1$.

Log Transformations

The log transformation curve shown in fig. A, is given by the expression,

$$s = c \log(1 + r)$$

where c is a constant and it is assumed that $r \geq 0$. The shape of the log curve in fig. A tells that this transformation maps a narrow range of low-level grey scale intensities into a wider range of output values. And similarly maps the wide range of high-level grey scale intensities into a narrow range of high level output values. The opposite of this applies for inverse-log transform. This transform is used to expand values of dark pixels and compress values of bright pixels.

Power-Law Transformations

The n th power and n th root curves shown in fig. A can be given by the expression,



$$s = cr^\gamma$$

This transformation function is also called as *gamma* correction. For various values of γ different levels of enhancements can be obtained. This technique is quite commonly called as *Gamma Correction*. If you notice, different display monitors display images at different intensities and clarity. That means, every monitor has built-in gamma correction in it with certain gamma ranges and so a good monitor automatically corrects all the images displayed on it for the best contrast to give user the best experience.

The difference between the log-transformation function and the power-law functions is that using the power-law function a family of possible transformation curves can be obtained just by varying the λ .

These are the three basic image enhancement functions for grey scale images that can be applied easily for any type of image for better contrast and highlighting. Using the image negation formula given above, it is not necessary for the results to be mapped into the grey scale range [0, L-1]. Output of $L-1-r$ automatically falls in the range of [0, L-1]. But for the Log and Power-Law transformations resulting values are often quite distinctive, depending upon control parameters like λ and logarithmic scales. So the results of these values should be mapped back to the grey scale range to get a meaningful output image. For example, Log function $s = c \log(1 + r)$ results in 0 and 2.41 for r varying between 0 and 255, keeping $c=1$. So, the range [0, 2.41] should be mapped to [0, L-1] for getting a meaningful image.

Power Law Transform

MATLAB CODE


```
image=imread('pout.tif');  
figure;  
imshow(image);
```



```
image_double=im2double(image);  
[r c]=size(image_double);  
cc=input('Enter the value for c==>');  
ep=input('Enter the value for gamma==>');  
for i=1:r  
    for j=1:c  
        imout(i,j)=cc*power(image_double(i,j),ep);  
    end  
end  
figure,imshow(imout);
```

OUTPUT

Enter the value for c==>1 Enter the value for gamma==>.2 % for gamma value less than 1 u gets Bright image

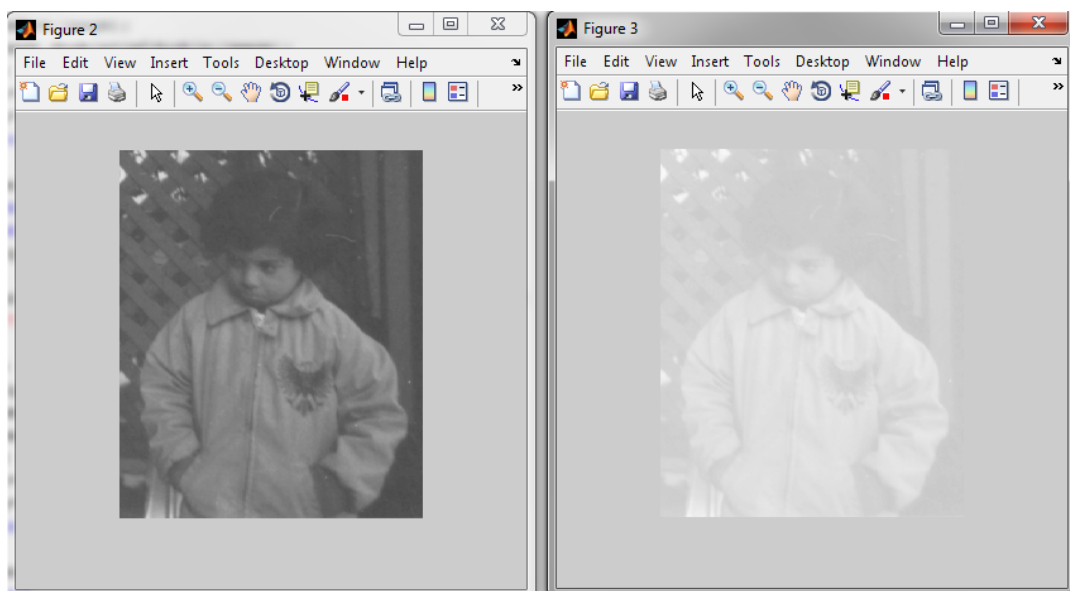

Original Image

Result after Applying Power Law Transformation



Enter the value for $c \Rightarrow 1$ Enter the value for $\gamma \Rightarrow 5\%$ for gamma value GREATER THAN 1 u gets dark image



Original Image

Result after Applying Power Law Transformation

TASK 1

Implement negation transform.

TASK 2

Implement Logarithmic transform.



TASK 3

Implement Piece wise linear transform.
